


BOOSTER OI 2400CFM 1000PSI

High-Pressure Oil-Injected Solution
(Diesel-Driven)

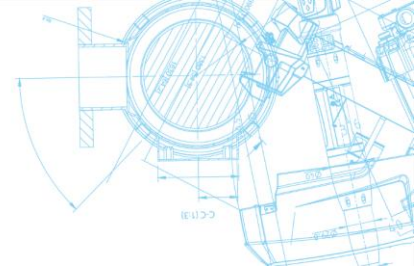

General Specification

Capacity	2602 cfm / 74 m ³ per min
Overall length	139" / 353 cm
Overall width	80" / 203 cm
Overall height	72" / 183 cm
Shipping weight (wet)	7870 lb / 3570 kg
Max. suction pressure	350 psig / 24 barg
Max. discharge pressure	1000 psig / 69 barg
Fuel tank capacity	85 gal / 322 liters
Fuel consumed	11 gal per hr / 42 liters per hr
Sound pressure level	LPA: 98 dB(A) @ 23' / 7 m

Features

Suitable for air and nitrogen applications
Automatic load and unload valve
Reliable piston compression system
Superior valve seals
Easy control and monitoring
Automatic high temperature/pressure shutdown system

Optional Accessories

Air Compressors	Nitrogen Generators	Air Accessories	Miscellaneous
Clean, dry feed air	Produce on-site	Air receivers	Trailers
	Nitrogen gas from	Air heaters	Fuel tank
Dryers	95% to 99.5% purity	After-coolers	Operator
Eliminate condensation		Filters	
		Hoses	
		Manifolds	

Version: North America – 26/06/2019



Atlas Copco Rental

www.atlascopcorental.com
 rental.usa@atlascopco.com – 800-736-8267
 Subject to change without prior notice. Information is for guidance only. Please contact your nearest
 Rental office for detailed application advice.

